


**AAA Series Micro Air Pump: Part No. 3A120INSN (Pressure) Specifications**

	Minimum Free Flow	Minimum Pressure @ Dead Head	Maximum Current @ Free Flow
<b>Model 15</b> .....	475 cc/min .....	2.4 psig (165 mbar) .....	35 mA
<b>Model 20</b> .....	685 cc/min .....	4.2 psig (289 mbar) .....	40 mA
<b>Model 25</b> .....	800 cc/min .....	5.0 psig (345 mbar) .....	45 mA
<b>Model 30</b> .....	885 cc/min .....	5.8 psig (400 mbar) .....	50 mA
<b>Rated Voltage</b> .....	12.0 volts DC		
<b>Motor Construction</b> .....	Iron Core, Sleeve Bearing		
<b>Diaphragm Material</b> .....	Neoprene (EPDM and Viton also available)		
<b>Pump Body Material</b> .....	Ryton		
<b>Operating Temperature Range</b> .....	32°–122°F (0°–50°C)		
<b>Weight</b> .....	1.0 oz (28 grams)		
<b>Size</b> .....	1.1 cubic inches		
<b>Options</b> .....	Four Port Locations		

**DIMENSIONS**

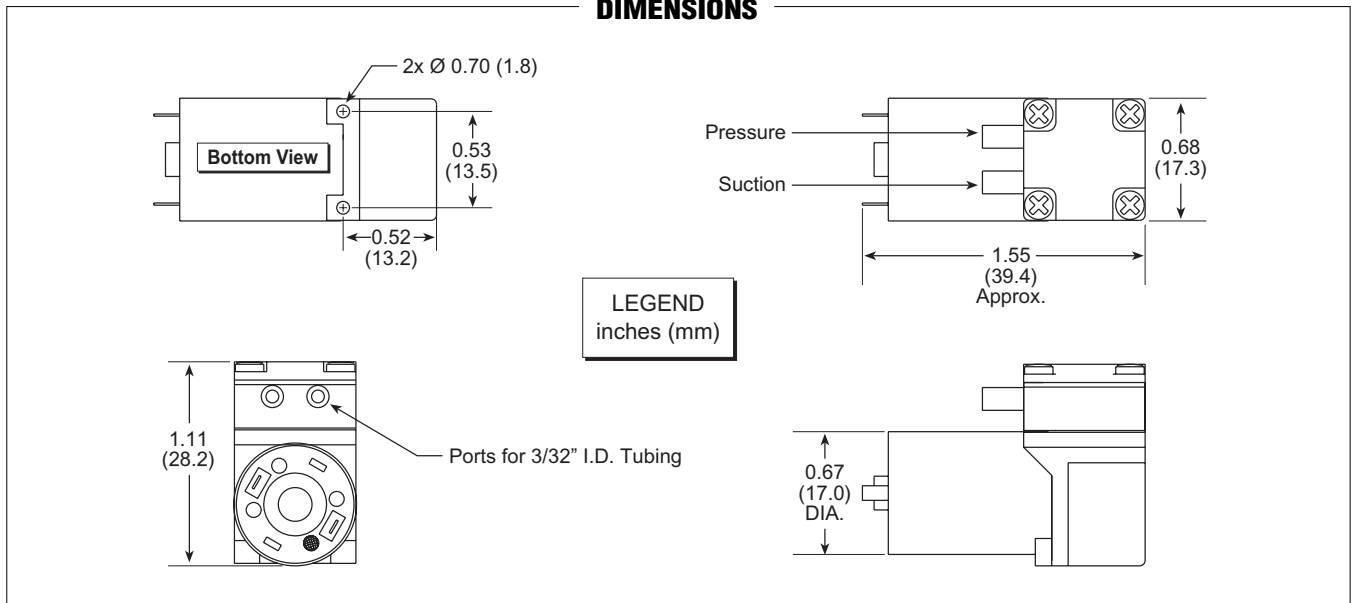

**PERFORMANCE**

