


**AAA Series Micro Air Pump: Part No. 3A060CNSN (Pressure) Specifications**

	Minimum Free Flow	Minimum Pressure @ Dead Head	Maximum Current @ Free Flow
<b>Model 15</b> .....	480 cc/min .....	2.7 psig (186 mbar) .....	29 mA
<b>Model 20</b> .....	645 cc/min .....	4.5 psig (310 mbar) .....	43 mA
<b>Model 25</b> .....	770 cc/min .....	5.0 psig (345 mbar) .....	45 mA
<b>Model 30</b> .....	875 cc/min .....	5.5 psig (379 mbar) .....	66 mA
<b>Rated Voltage</b> .....	6.0 volts DC		
<b>Motor Construction</b> .....	Ironless Rotor, Sleeve Bearing		
<b>Diaphragm Material</b> .....	Neoprene (EPDM and Viton also available)		
<b>Pump Body Material</b> .....	Ryton		
<b>Operating Temperature Range</b> .....	32°–122°F (0°–50°C)		
<b>Weight</b> .....	1.0 oz (30 grams)		
<b>Size</b> .....	1.1 cubic inches		
<b>Options</b> .....	Four Port Locations		

**DIMENSIONS**

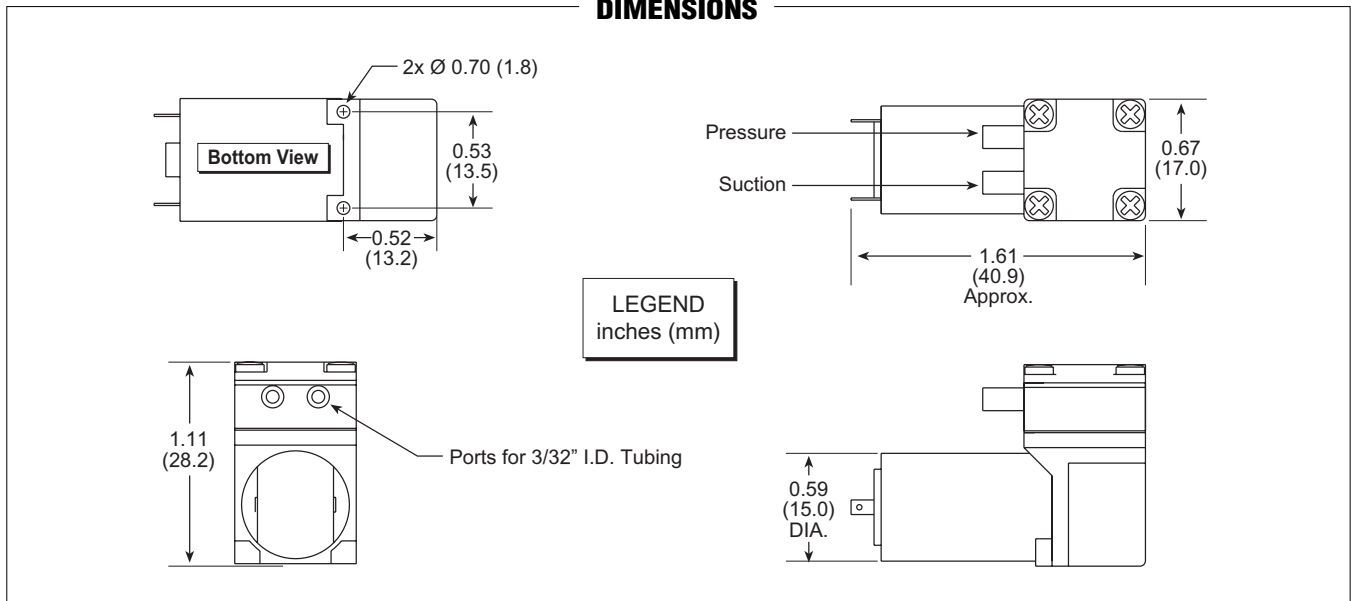

**PERFORMANCE**

