


**AAA Series Micro Air Pump: Part No. 3A060INSN (Pressure) Specifications**

|  | Minimum Free Flow                        | Minimum Pressure @ Dead Head | Maximum Current @ Free Flow |
|--|--|------------------------------|-----------------------------|
| <b>Model 15</b> .....                    | 810 cc/min .....                         | 2.3 psig (159 mbar) .....    | 95 mA                       |
| <b>Model 20</b> .....                    | 1100 cc/min .....                        | 4.0 psig (276 mbar) .....    | 110 mA                      |
| <b>Model 25</b> .....                    | 1295 cc/min .....                        | 4.5 psig (310 mbar) .....    | 110 mA                      |
| <b>Model 30</b> .....                    | 1410 cc/min .....                        | 5.6 psig (386 mbar) .....    | 130 mA                      |
| <b>Rated Voltage</b> .....               | 6.0 volts DC                             |                              |                             |
| <b>Motor Construction</b> .....          | Iron Core, Sleeve Bearing                |                              |                             |
| <b>Diaphragm Material</b> .....          | Neoprene (EPDM and Viton also available) |                              |                             |
| <b>Pump Body Material</b> .....          | Ryton                                    |                              |                             |
| <b>Operating Temperature Range</b> ..... | 32°–122°F (0°–50°C)                      |                              |                             |
| <b>Weight</b> .....                      | 0.7 oz (21 grams)                        |                              |                             |
| <b>Size</b> .....                        | 0.9 cubic inches                         |                              |                             |
| <b>Options</b> .....                     | Four Port Locations                      |                              |                             |

**DIMENSIONS**

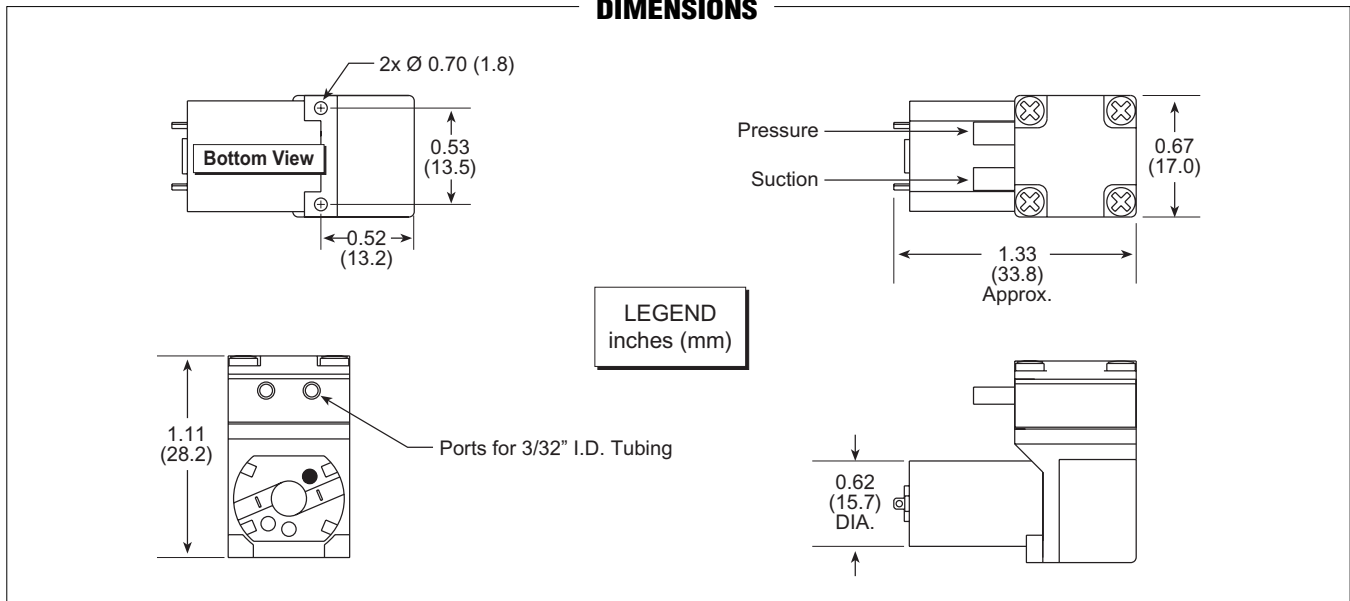

**PERFORMANCE**

