


AAA Series Micro Air Pump: Part No. 3A060INSN (Vacuum) Specifications

| | Minimum Free Flow | Minimum Vacuum @ Dead Head | Maximum Current @ Free Flow |
|--|--|----------------------------|-----------------------------|
| Model 15 | 805 cc/min | 6.8 "Hg (230 mbar) | 95 mA |
| Model 20 | 985 cc/min | 9.4 "Hg (317 mbar) | 110 mA |
| Model 25 | 1260 cc/min | 10.4 "Hg (351 mbar) | 110 mA |
| Model 30 | 1330 cc/min | 11.6 "Hg (392 mbar) | 130 mA |
| Rated Voltage | 6.0 volts DC | | |
| Motor Construction | Iron Core, Sleeve Bearing | | |
| Diaphragm Material | Neoprene (EPDM and Viton also available) | | |
| Pump Body Material | Ryton | | |
| Operating Temperature Range | 32°–122°F (0°–50°C) | | |
| Weight | 0.7 oz (21 grams) | | |
| Size | 0.9 cubic inches | | |
| Options | Four Port Locations | | |

DIMENSIONS

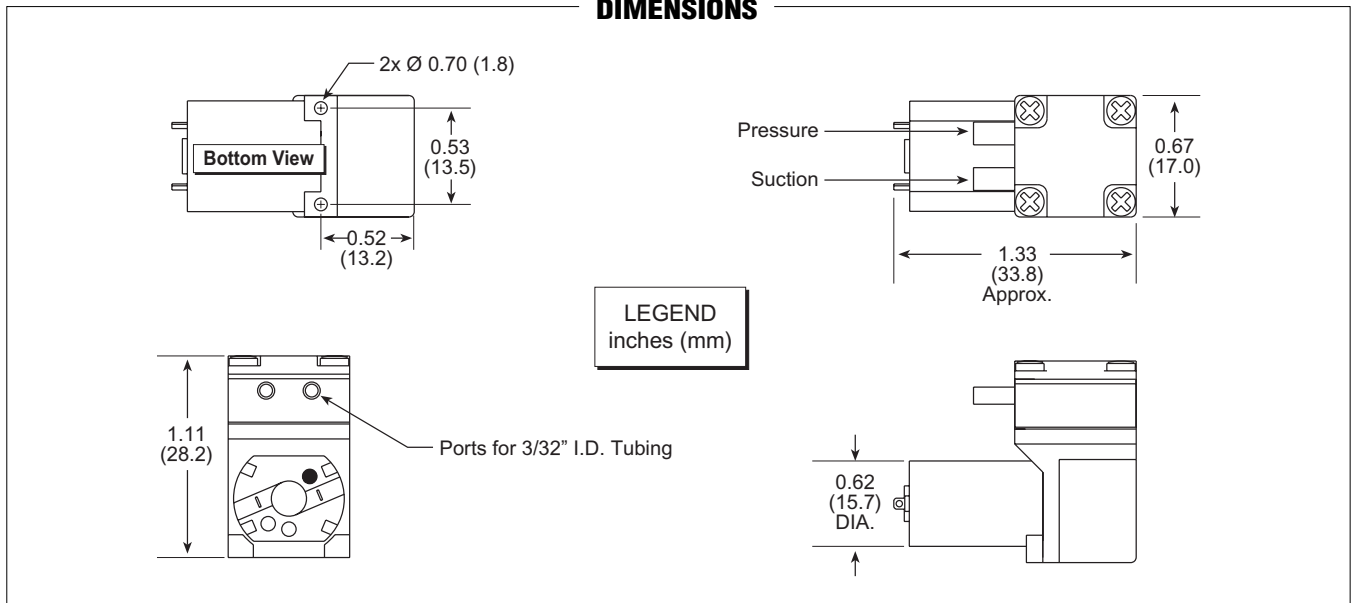

PERFORMANCE

