



B Series Micro Air Pump: Part No. BP120INNN (Pressure) Specifications

	Minimum Free Flow	Minimum Pressure @ Dead Head	Maximum Current @ Free Flow
Model 30	7.8 LPM	6.5 psig (448 mbar)	153 mA
Rated Voltage	12.0 volts DC		
Motor Construction	Iron Core, Sleeve Bearing		
Diaphragm Material	Neoprene (EPDM and Viton also available)		
Pump Body Material	Valox		
Operating Temperature Range	32°–122°F (0°–50°C)		
Weight	5.2 oz (148 grams)		
Size	9.5 cubic inches		
Options	Four Port Locations, 0.19" Dia. Ports for 3/16" I.D. Tubing, Vibration Mounts.		

DIMENSIONS

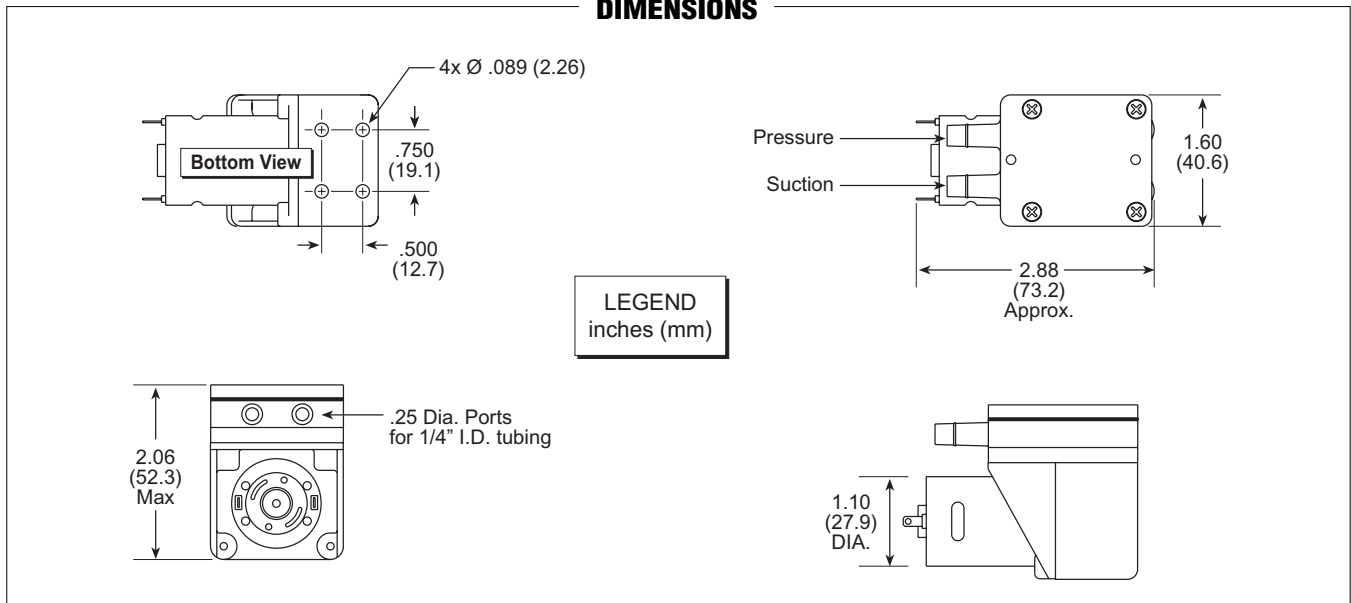


PERFORMANCE

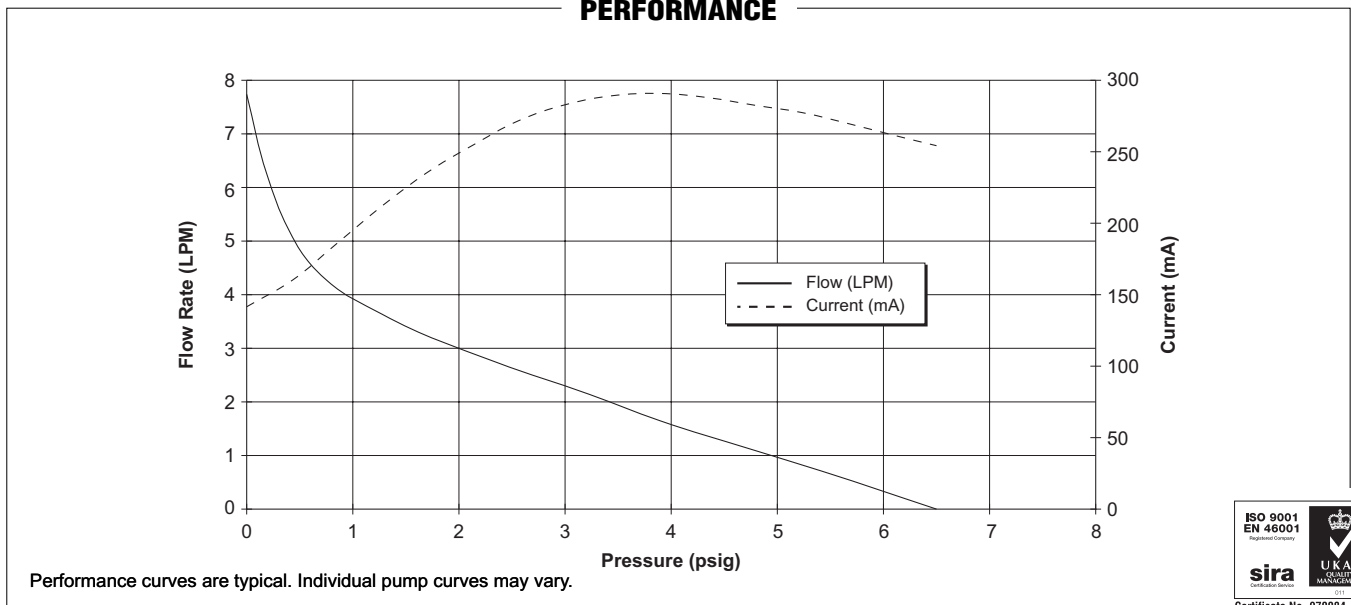

B Series Micro Air Pump: Part No. BP120INNN (Vacuum) Specifications

	Minimum Free Flow	Minimum Vacuum @ Dead Head	Maximum Current @ Free Flow
Model 30	7.7 LPM	11.2 "Hg (378 mbar)	153 mA
Rated Voltage	12.0 volts DC		
Motor Construction	Iron Core, Sleeve Bearing		
Diaphragm Material	Neoprene (EPDM and Viton also available)		
Pump Body Material	Valox		
Operating Temperature Range	32°–122°F (0°–50°C)		
Weight	5.2 oz (148 grams)		
Size	9.5 cubic inches		
Options	Four Port Locations, 0.19" Dia. Ports for 3/16" I.D. Tubing, Vibration Mounts.		

DIMENSIONS

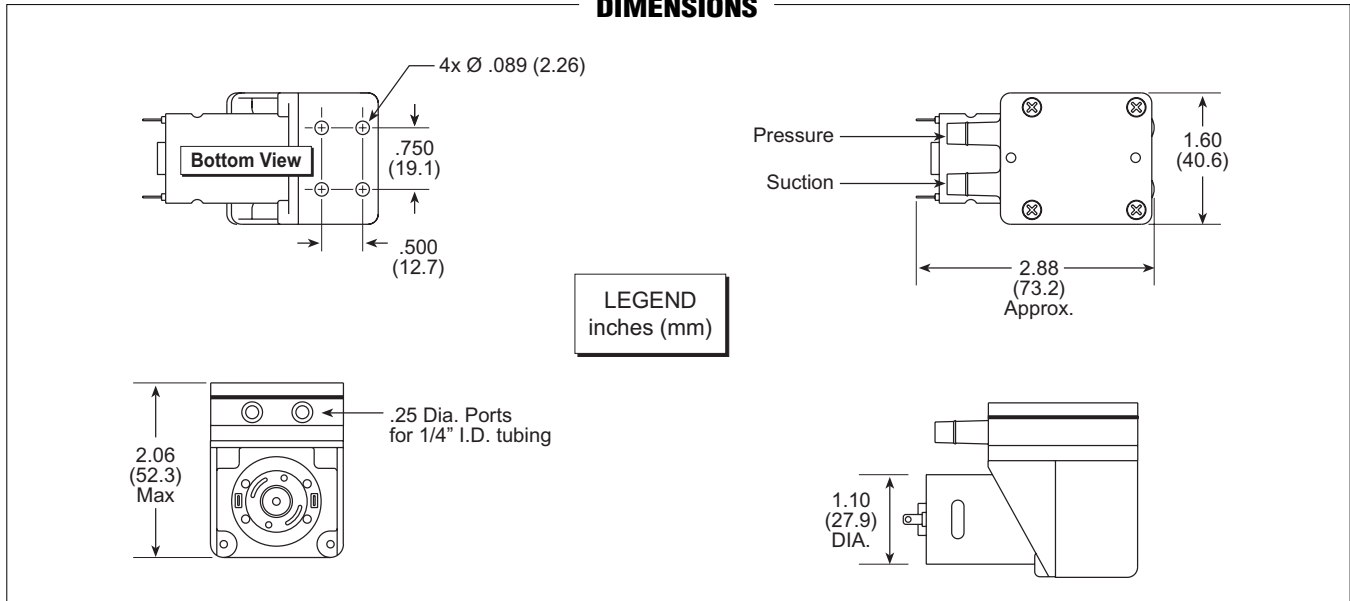

PERFORMANCE

